






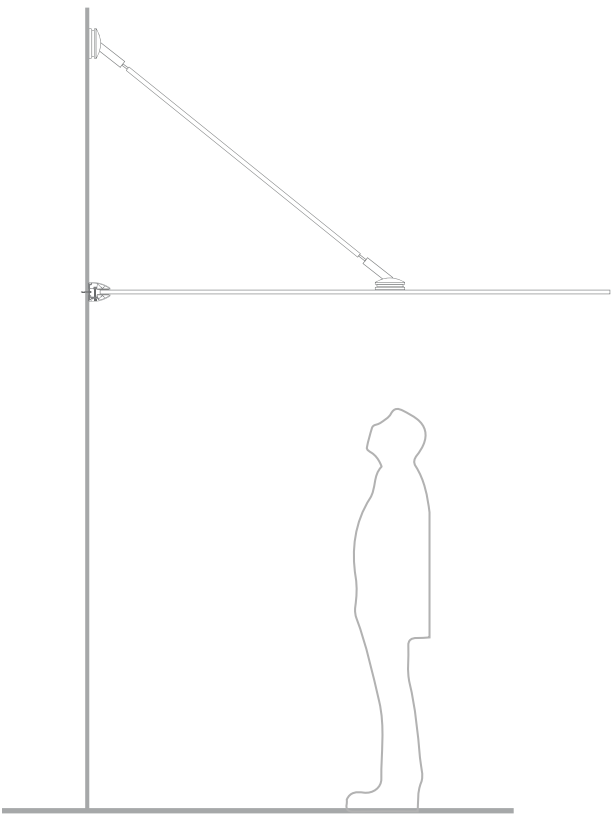


The glassboard is supported by a uniform beam of Salinox's crystal railing bases (depending on the projection distance and glass thickness).

For constructions less than 1.2m long, the glassboard does not need additional support with struts, as it has been measured that it can easily withstand windpressures and snowloads.

projection	suggested mount
< 50cm	  sb7060
< 1m	  sb1010
< 1.20m	   sb1210 sb1412



For projections longer than 1.2m, stainless steel struts must be used for additional support to the glassboard.